


ASSEMBLY INSTRUCTIONS

THE IMAGES ARE FOR REFERENCE ONLY.

NOTE: TO PREVENT SCRATCHING THE TOP, ASSEMBLE THE TABLE
ON A SOFT SURFACE LIKE A RUG



STEP 1: PREPARING THE TOP

PLACE THE TOP ON A CLEAN AND FLAT SURFACE TO EXPOSE THE MOUNTING HOLES. PLACE THE LEGS ALIGNING THEM WITH THE HOLES ON THE TOP.

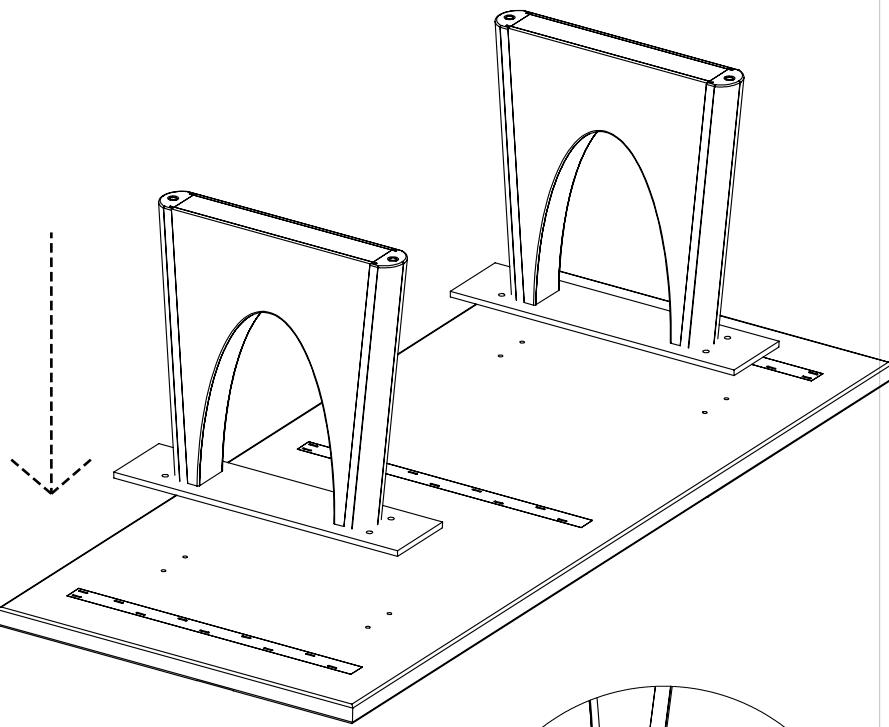

STEP 2: SECURING THE BASE

USING THE HARDWARE AS SHOWN IN DETAIL A, INSERT THE SCREWS INTO THE CORRESPONDING HOLES. ONCE ALLSCREWS ARE IN POSITION, FULLY TIGHTEN THEM USINGTHE 3/16" HEX KEY.

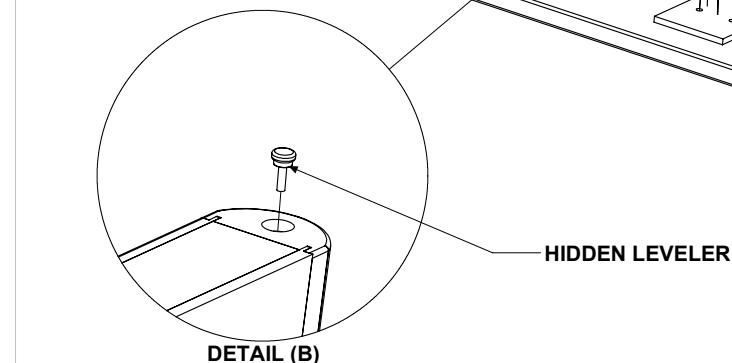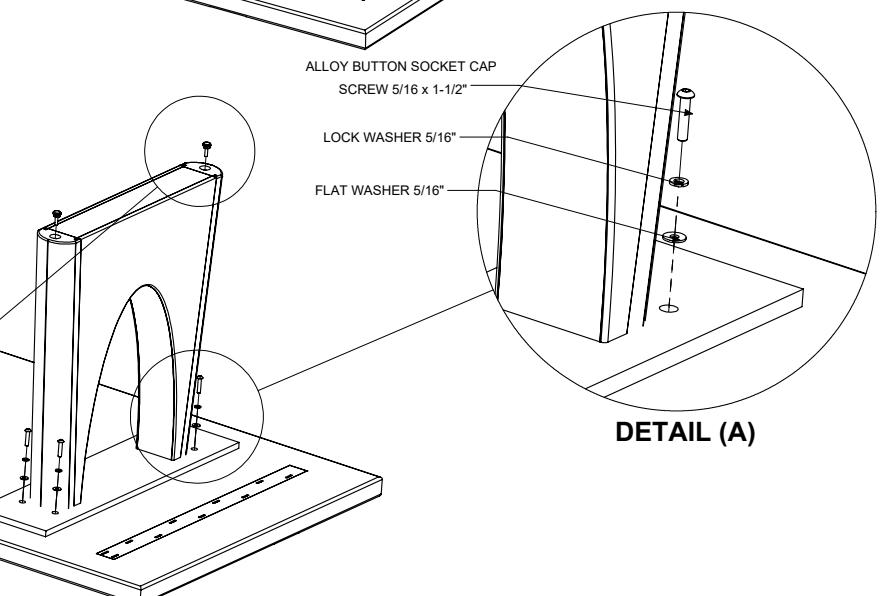

STEP 3: FINAL PLACEMENT

WITH THE ASSISTANCE OF A HELPER, TURN THE TABLE UPRIGHT AND PLACE IT IN YOUR DESIRED LOCATION. ADJUST THE HIDDEN LEVELERS AT THE BOTTOM OF THE LEGS IF NECESSARYAS SHOWN IN DETAIL B.
ASSEMBLY IS COMPLETE.



| ITEM | # |
|---|---|
| ALLOY BUTTON SOCKET CAP SCREW 5/16 x 1-1/2" | 8 |
| LOCK WASHER 5/16" | 8 |
| FLAT WASHER 5/16" | 8 |
| HEX KEY 3/16" | 1 |