

ASSEMBLY INSTRUCTIONS

THE IMAGES ARE FOR REFERENCE ONLY.


NOTE: TO PREVENT SCRATCHING THE TOP, ASSEMBLE THE TABLE ON A SOFT SURFACE LIKE A RUG

STEP 1: PREPARING THE TOP

PLACE THE TOP ON A CLEAN AND FLAT SURFACE TO EXPOSE THE MOUNTING HOLES. PLACE THE LEGS ALIGNING THEM WITH THE HOLES ON THE TOP.

STEP 2: SECURING THE BASE

USING THE HARDWARE AS SHOWN IN DETAIL A, INSERT THE SCREWS INTO THE CORRESPONDING HOLES. ONCE ALL SCREWS ARE IN POSITION, FULLY TIGHTEN THEM USING THE 3/16" HEX KEY.

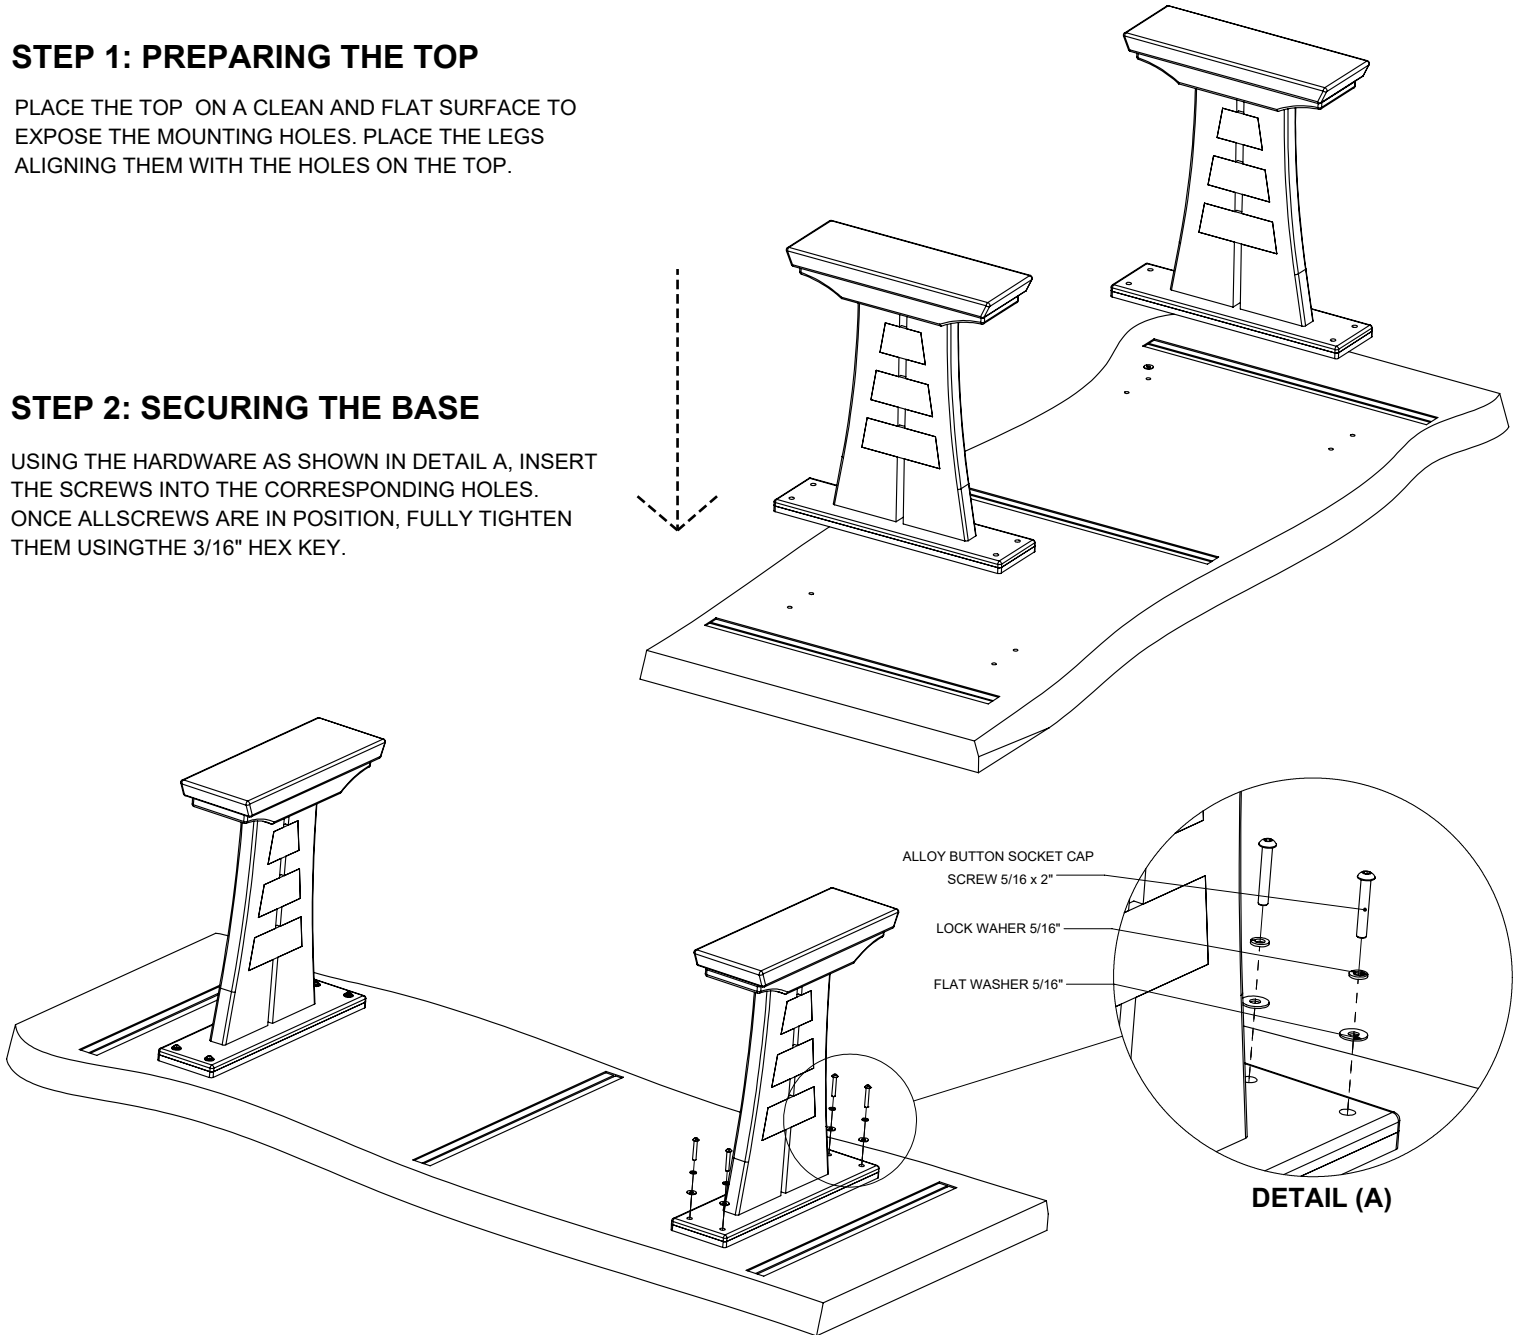

STEP 3: FINAL PLACEMENT

AS A FINAL STEP, ONCE ALL THE HARDWARE IS FULLY TIGHTENED, WORK WITH A HELPER TO TURN THE PIECE UPRIGHT AND PLACE IT IN YOUR PREFERRED LOCATION.



ITEM	#
ALLOY BUTTON SOCKET CAP SCREW 5/16 x 2"	8
LOCK WASHER 5/16"	8
FLAT WASHER 5/16"	8
HEX KEY 3/16"	1

I-TBL-E033